

lepow

# Retro External Battery

POWER BANK SERIES

10000mAh/15000mAh

## User manual

Thanks for your support to LEPOW!

Please read the guide for Maintenance carefully in order to protect your legal interests.

### ENGLISH

#### Operation Steps

1. Shake the mobile power to show the remaining battery power. Each bar of the five-bar indicator lights represents 20% battery capacity. In order not to affect your use, when the battery does not show any light, please recharge it in time.
2. With the high-speed output interface of 2.1A, advanced "self-adaptation" adjusting function and automatic adjustment of output current, it can recharge 99% of digital products such as IPAD/IPHONE/PSP/MP4/MP3/digital camera.
3. When your mobilephone or power source is recharged to full, the power source will automatically launch the dormancy function and stop working to protect the mobilephone and power source.

#### Warm prompt:

Please recharge your portable power source on a regular basis (recharging at least once every six months is suggested), for it can prolong the service life of the battery.

#### Clause of warranty


The Warranty period lasts for one year after purchase of the product. Within the warranty period, consumers may enjoy free repair service at the place of purchase with proof of purchase/buying record. If service is required but the warranty period has been exceeded, present product and proof of purchase at your retailer for discounted repairs.

#### Exclusions of Limited Warranty

1. Products are not produced by LEPOW.
2. Products are not distributed or resold by LEPOW China.
3. Damage caused by natural disaster or accident such as earthquake, fire etc...
4. Damage caused by human error such as unauthorized disassembling, modifications, incorrect setting, storage or use, improper voltage and current input etc...
5. Unauthorized alteration or tearing of product bar code.
6. Device and parts exceeding warranty period.

\*All rights reserved by LEPOW China.

Starting with tiny powerbank supply, choose the purity , say goodbye to the confusion.

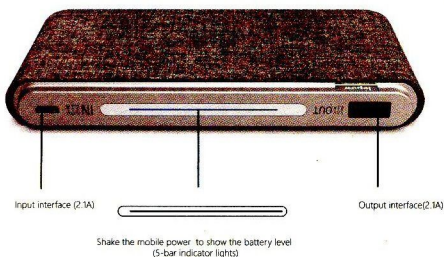

Model	P20G	P20 plus
Cell type	Li -Polymer	Li -Polymer
Capacity	10000mAh	15000mAh
Dimensions	51.2in*27.9in*6.8in (130.8mm X 70.9mm X 17.2 mm)	52.4in*28.3in*8.1in (133mm X 72mm X 20.6mm)
Operating temperature	41°F~113°F(5°C~45°C)	41°F~113°F(5°C~45°C)
Output voltage	DC5V	DC5V
Output current	2100mA	2100mA
Input voltage	DC5V	DC5V
Input current(Max)	2100mA	2100mA
Input voltage (Standard)	5.0 V	5.0 V
Input voltage (Threshold)	5.0V±0.25V	5.0V±0.25V
Product standard	GB4706.18-2014	GB4706.18-2014

1. Avoid strenuous vibration, shock, exposure to sunlight or rain.
2. Store between 23°F~95°F(-5°C~35°C), with relative humidity below 75% in a clean, dry, and well-ventilated area. Avoid contact with corrosive substances and/or fire.
3. Do not discard product in household garbage. Please dispose of this product in a suitable location, specialized for electrical equipment and battery recycling.

Product	The name and concentration of the harmful substance or element in the product					
	Pb	Hg	Cd	Cr(Vi)	PBDE	PBB
P20	X	○	○	○	○	○

O: means the content of such hazardous substance among all homogeneous materials in this part is under the limit rated by the standard of S/T 1363-2006.

X: means the content of such hazardous substance in some kind of homogeneous material in this part is beyond the limit rated by the standard of S/T 1363-2006, but still fits the clause of exemption in RoHS.