

Mifa

F5

Portable Bluetooth Speaker



LIGHT YOUR FIRE

USER MANUAL ▶

LISTEN.MIFA
THE MUSIC POWER TO
YOUR DEEP HEART!



JUST ENJOY

01 Warnings

English



- ◆ Please use and store this product at room temperature
- ◆ Do not expose this product to rain or wet conditions
- ◆ Do not throw and drop this product to avoid product damage
- ◆ Do not self-dismantling ,repair and transform the product
- ◆ Do not use chemical solvent cleaning the product
- ◆ Please don't arbitrarily discarded or placed the lithium battery in the fire in order to avoid the risk of explosion


02 Product Features

English

- ◎ DSP 3D surround stereo sound effect
- ◎ 3D mega bass enhance
- ◎ Support Bluetooth wireless connection and with hands-free function
- ◎ Support Bluetooth one button reconnect
- ◎ Support APE,FLAC format audio files
- ◎ Support MP3,WAV,WMA format audio files
- ◎ Auxiliary enabled , data exchanging directly enabled
- ◎ Intelligent power save , with LED charging indicator
- ◎ Automatically power off when there is no any operation in 10 minutes
If there is no operation in 20minutes ,It will power off automatically while in bluetooth mode.
- ◎ With voice prompt function
- ◎ Support ring tone play under iOS system

03 Packing Content

English

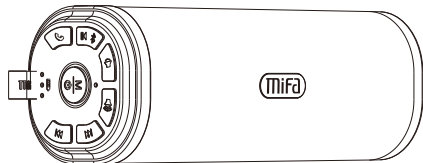

Speaker 1pc




User Manual




3.5mm audio cable 1pc



USB cable 1pc




Warranty Card




Hook 1pc

04 Keys Function


English

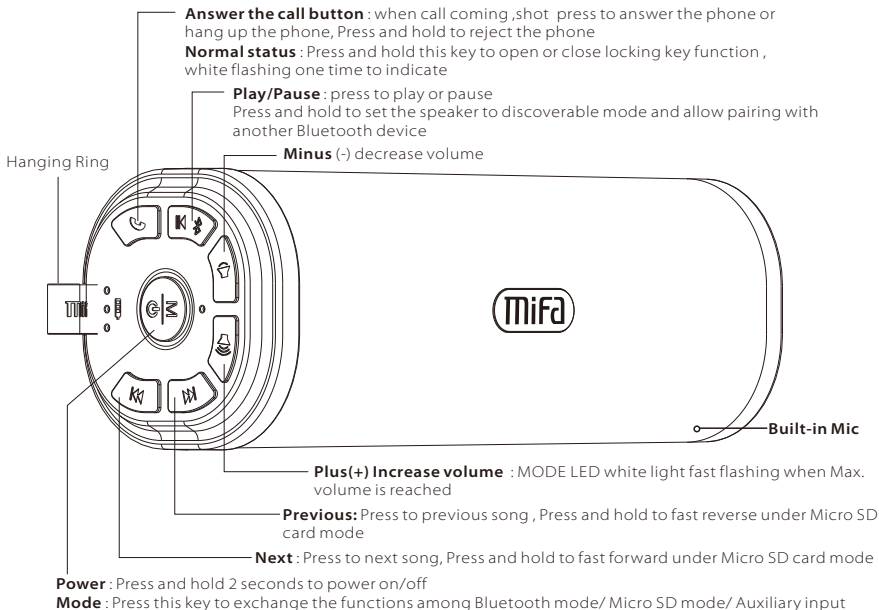

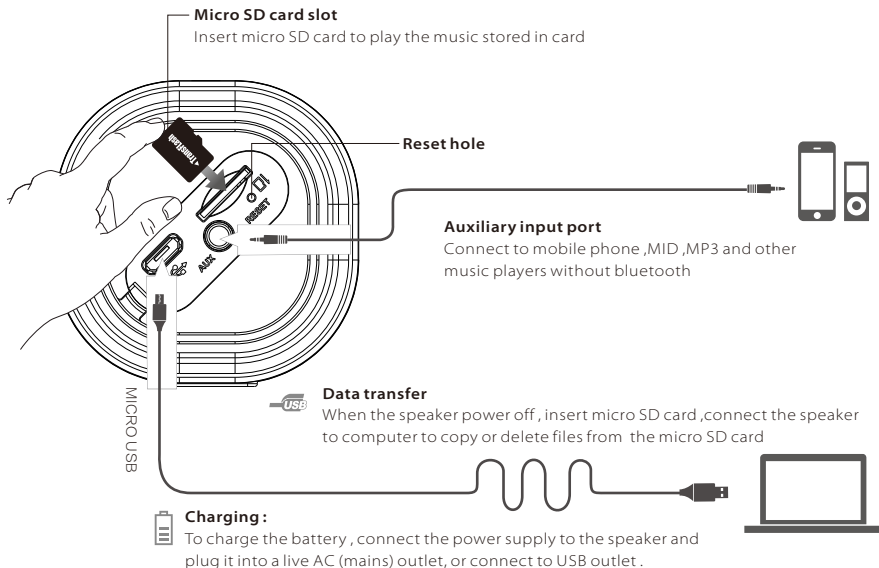

06 Charging LED light

English

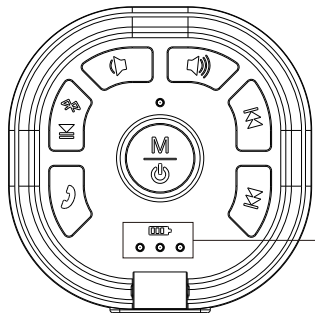

Battery Indicator

100% full charge

Continuous white

75% of full charge

Continuous white

30% of full charge

Continuous white

15% of full charge
Turn to be red (low battery ,charge needed)

Power off soon
Flashing red

Charging LED light

75% of full charge

Continuous white Flashing

15% of full charge


Continuous white Flashing in turn








Charging
Flashing in turn

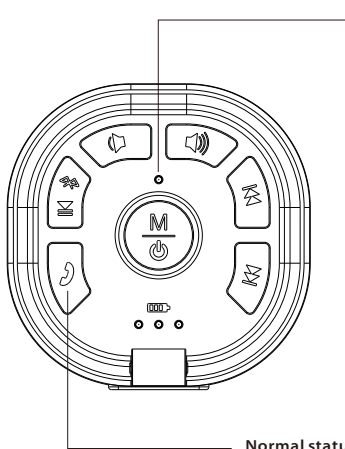

Notes:

When low battery , power on the red LED fast flickering , and then power off 15 seconds later




-  **Power on :** white flashing ,ready for bluetooth pairing , paired continuous white
-  **Pause in bluetooth mode:** white slow flashing
-  **Micro SD card playing mode :** white LED light keeps on
-  **Micro SD card playing pause :** White LED light flickering
-  **Auxiliary works mode :** White LED light keeps on
-  **Auxiliary Mute mode:** White LED light flickering
-  **Max. volume :** White LED light fast flickering


Normal status : Press and hold this key to open or close locking key function , white flashing one time to indicate

08 Pairing with Bluetooth devices

English

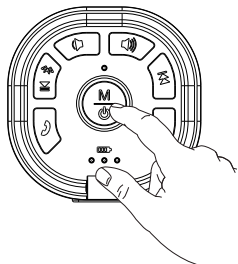


Power on the speaker ,after "Dingdong" sound and "Bluetooth enabled",blue light flickering , allow pairing a Bluetooth device.



Wireless range
up to 10m

Turn on the Bluetooth device , set it to "discover" the "Mifa-F5", then locate the Bluetooth device list ,from the Bluetooth device list select the device named "Mifa_F5", and then start to connect .

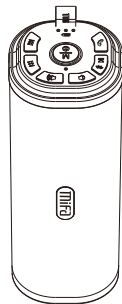

When pairing is complete ,white LED light remains steadily on

Notes:



- 1, The default password is "0000"
2. The speaker will auto connect the last paired device when it powers on
3. If want to connect other devices , press  to disconnect first ,and then the speaker is discoverable and ready to pair a new device

09 Technique Parameters

English

Basic parameters


Speaker type	Portable Bluetooth Speaker
Speaker system	2.0 channel +bass
Active/passive	Active
Operate mode	Button
Main functions	DSP 3D surround stereo sound effect, Bluetooth ,hands-free , Auxiliary etc
Storage type	Max.32GB micro SD card
Power supply	built in 1200mAh lithium battery DC5V-500mA USB adapter

Technique Parameters

Loudspeaker	1.5inch *2 +bass radiator
RMS	6WTHD=10%
Frequency Response	100Hz~20KHz
Bluetooth version	Bluetooth 3.0+EDR
USB specification	USB2.0 Compatible with USB1.1

Playing function

File format	APE、FLAC、WAV、WMA、MP3
Bit Rate	MP3、8Kbps-320Kbps
	WMA、32Kbps-384Kbps
	APE、600Kbps-1400Kbps
	FLAC、600Kbps-1400Kbps
	WAV、32Kbps-1200Kbps

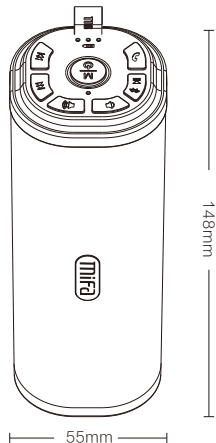

Product size : W55xD55xH148mm

Product weight : 300g (including battery inside)

Problems	What to do
Paired Bluetooth device will not connect	1.Restart the speaker
	2.If need password , please input "0000"
Music play hang up	Please check the Bluetooth connection valid distance or if something cut off the signal
File format fault	1. Check if the TF card format is right (the speaker just can support FAT 32 format TF card)
	2.Check if the music file format store in TF card is right ,the speaker just can support APE/FLAC/WAV/WMA/MP3 format files
Speaker indicates a connection ,but is not playing music	1.Check the volume of speaker
	2.Check if the speaker is in mute or pause
Poor sound quality From the AUX source	Check if the audio cable connect right
Speaker will not turn on	Check if the battery is low
System halted	Reset the speaker



MIFA INNOVATIONS LLC Hotline : 4007-881-899 www.mifalife.net Made in China

©2013 MIFA all rights reserved .The product and the packaging trademarks or registered trademarks of MIFA INNOVATIONS LLC in the united states or other countries .All rights reserved . Other trademarks and trade names are registered mark of their respective owners . MIFA INNOVATIONS LLC for any errors that may occur in this manual does not undertake any responsibility. The information contained in this manual are subject to change no prior notice.